


NOTE:
MINIMUM COVER TO BE
BELOW OFFICIAL
STREET GRADE.

TRENCH TO BE BRACED OR
SHEETED AS NECESSARY
FOR THE SAFETY OF THE
WORKERS AND THE PRO-
TECTION OF OTHER UTILITIES.

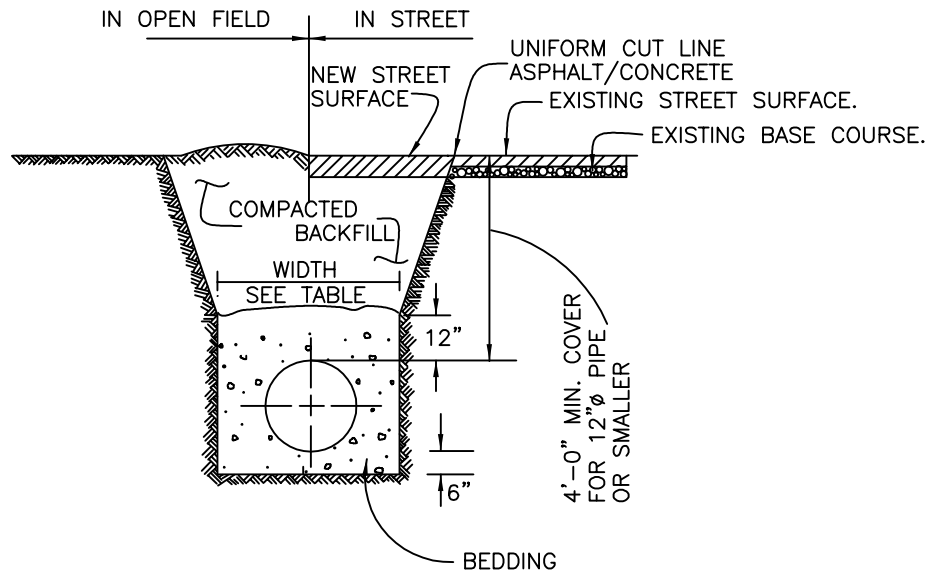

TYPICAL TRENCH SECTION

FOR PATCHING IN STREET SURFACE
USE FULL DEPTH ASPHALT AS NOTED
BELOW OR MATCH EXISTING PLUS
ONE (1) INCH, WHICH EVER IS GREATER

PIPE DIAMETER	MINIMUM WIDTH
4"	1'-8"
6"	1'-10"
8"	2'-0"
12"	2'-4"

STREET CLASSIFICATION	DEPTH ASPHALT
ARTERIAL	9"
COLLECTOR	7"
LOCAL	6"



CITY of DELTA
360 MAIN STREET
DELTA, CO 81416

TYPICAL TRENCH SECTION
PIPE PROTECTION

DATE: DEC. 1998

SHEET W1 OF 13